


ARDEX A 46

RAPID DRYING EXTERNAL PATCHING COMPOUND

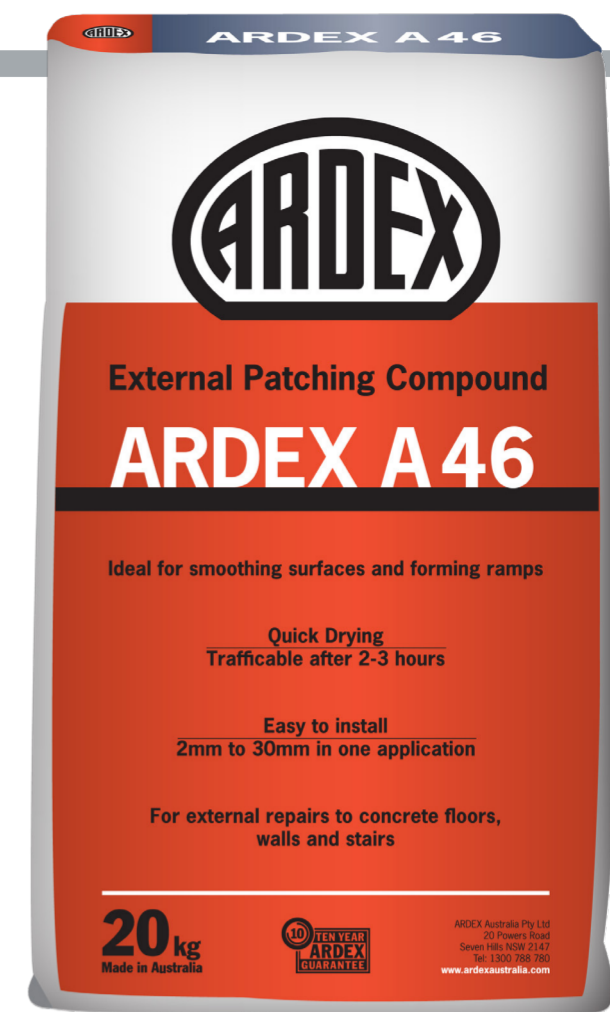

ARDEX A 46 is a rapid hardening, rapid drying, slump-free mortar for external repairs. It is ideal for repairing and resurfacing concrete stair treads, risers, and subfloors. ARDEX A 46 is easy to use, mixes and trowels easily, and gives a smooth finish on both walls and floors.

- Quick drying - trafficable after 2-3 hours
- Easy to install
- 2 - 30mm in one application
- Suitable for external patch repairs
- Slump-free
- Shrinkage free finish
- Exceptional hardness
- Suitable for light vehicle traffic
- Can be applied to damp substrates

Set times

- Initial set: : 15 - 20 min
- Light foot traffic: 2 - 3 hours
- Ready for coatings: 24 - 48 hours

Coverage

- 14m² at 1mm thickness per bag

Location

- Internal or external
- Vertical, horizontal, or overhead

System Components

- Primer & Additive: ARDEX WR Prime
- Zinc Primer: ARDEX BR 10 ZP

Typical use

- Repairing & resurfacing concrete subfloors and stair treads
- Patch repairs to walls and floors
- Creating ramps
- Forming coves
- Filling cracks

Packaging

20kg bag

Code

25354



To find out more call 0800 227 339
or visit www.ardex.co.nz



SYSTEMARDEX
PREMIUM PERFORMANCE