


# ARDEX K 15

## RAPID-DRYING, SELF-LEVELLING SMOOTHING COMPOUND

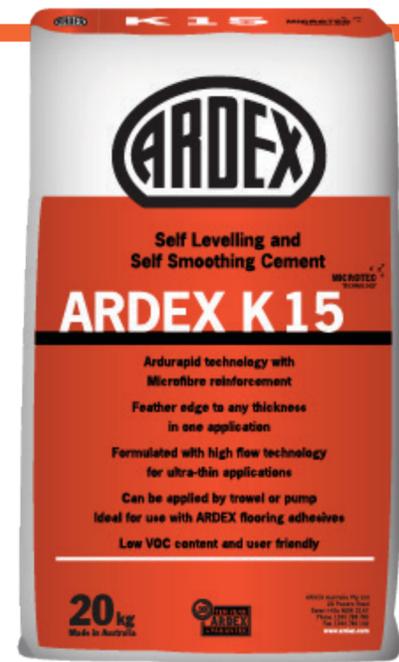

ARDEX K 15 is a special cement blend featuring Microtec technology and reinforcement. ARDEX K 15 hardens quickly and achieves high early strength. It will not shrink or spall, even when applied in thick layers. Formulated with high flow properties, ARDEX K 15 remains fluid even for applications requiring 3mm or less to provide a durable, flat, smooth floor finish.

- Ardurapid technology
- Reinforced with microfibre
- High-flow properties for ultra-thin applications
- Feather edge to any thickness in one application
- Applied by trowel or pump
- Low VOC
- Self-levelling and self-smoothing

#### Substrates

- New, existing or rough screeded concrete
- Rain damaged concrete which has been mechanically prepared
- Existing quarry and ceramic tile
- Steel decking (contact ARDEX Technical Services)
- Timber floors (contact ARDEX Technical Services)
- Damp or moisture-vulnerable concrete when used in conjunction with an ARDEX moisture control system

#### Location

- Internal
- Above or below ground applications

#### Floor coverings

- Linoleum, vinyl, carpet
- Ceramic and quarry tiles
- Timber – parquetry and floating

#### Coverage

- A 20kg bag will cover approx. 12m<sup>2</sup> at 1mm thickness

#### Packaging

20kg bag

#### Code

16632



To find out more call 0800 227 339  
or visit [www.ardex.co.nz](http://www.ardex.co.nz)



**SYSTEMARDEX**  
PREMIUM PERFORMANCE