




TECHNICAL DATA SHEET

Customer Services
CHC : 03 379 7067 or AKL: 09 443 7067
Email: help@giltedge.co.nz

Technical & Sales Assistance
Email: help@giltedge.co.nz
www.giltedge.co.nz

Gilt Edge Industries Ltd®

ROLL STRIPPER RO-2

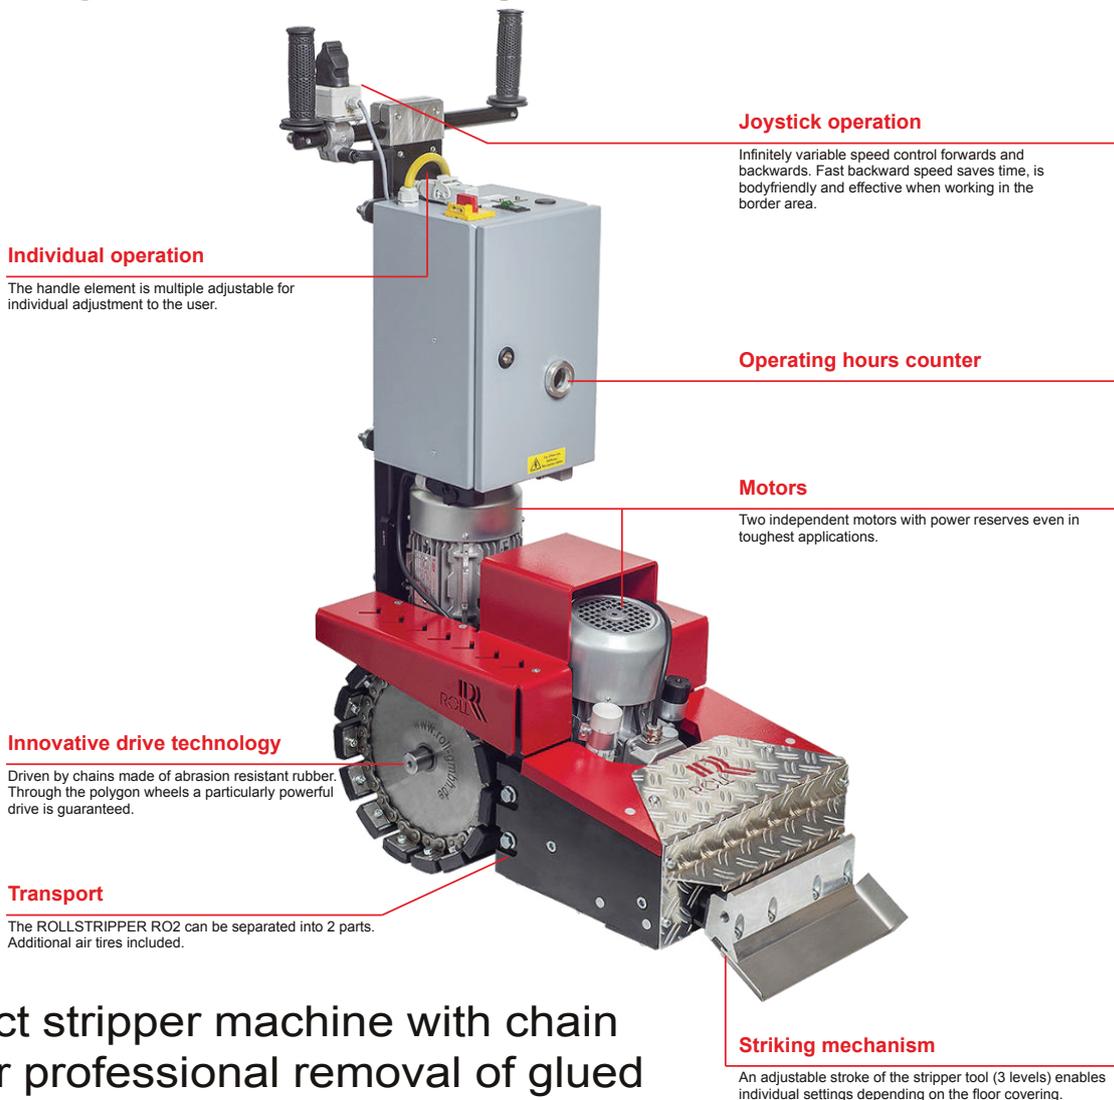

Joystick operation

Infinitely variable speed control forwards and backwards. Fast backward speed saves time, is bodyfriendly and effective when working in the border area.

Individual operation

The handle element is multiple adjustable for individual adjustment to the user.

Operating hours counter

Motors

Two independent motors with power reserves even in toughest applications.

Innovative drive technology

Driven by chains made of abrasion resistant rubber. Through the polygon wheels a particularly powerful drive is guaranteed.

Transport

The ROLLSTRIPPER RO2 can be separated into 2 parts. Additional air tires included.

Striking mechanism

An adjustable stroke of the stripper tool (3 levels) enables individual settings depending on the floor covering.

Compact stripper machine with chain drive for professional removal of glued floor coverings such as parquet, carpeting, linoleum, PVC and vinyl.

Special features:

- powerful industrial motors
- innovative drive technology
- innovative tool technology
- joystick operation
- low vibration and noise level
- easy to transport

Areas of application:

- Removal of parquet
- Removal of elastic floor coverings
- Removal of textile floor coverings
- Removal of PVC floor coverings

Included in delivery:

- Stripper tool 250mm flat
- Stripper tool 250mm Ushape
- 10m industrial extension cable
- Tool kit
- Carrying handles
- Personal protective equipment
- Transport wheels with pneumatic tires

Technical specifications:

Drive engine	1,5 kW, 230 volts with worm gear
Torque:	327 Nm
Stroke engine:	1,1 kW, 230 volts
Blow count:	2500 beats per minute (bpm)
Stroke length:	adjustable in 3 levels
Working width:	up to 350 mm
Dimensions:	380 x 760 x 1100 mm
Weight:	195 kg