



Lamilay™

Laminate and Flooring

Flooring Underlay


Roberts® Lamilay™ Laminate and Floating Floor Underlay is designed for use as an underlay for laminate floating floor underlays. Roberts® Lamilay™ Laminate and Floating Floor Underlay can only be used over wooden or above-grade concrete sub-floors.

INSTALLATION OVERVIEW

Always follow the Laminate Flooring Manufacturer's instructions with respect to preparing and levelling the sub-floor prior to installing the underlay and flooring. Many manufacturer's recommend the sub-floor be level within 3mm over a 3 metre span in all directions.

Always follow the Laminate Flooring Manufacturer's instructions on when to use moisture barriers. A moisture barrier is generally required over any type of on grade concrete sub-floor.

Make sure the sub-floor is clean and dry. Lay out the Roberts® Lamilay® Laminate and Floating Floor Underlay in accordance with the installation instructions enclosed with each roll. Cover the entire floor area and run the underlay up the perimeter walls approximately 50mm. After the flooring boards are installed and before the skirting boards or mouldings are fitted, the excess underlay should be trimmed to the height of the floor surface using a sharp knife (see photo, right)

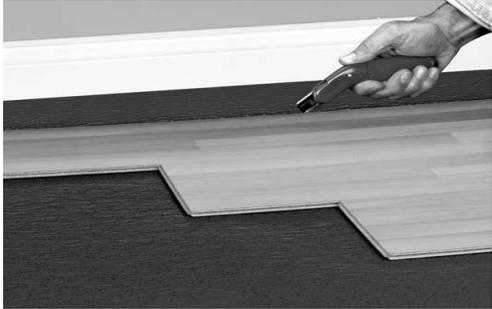

Technical Specifications

Item Code	70-200	70-20050
Bar Code	9328968005952	9328968006027
Description	Roberts® Lamilay™ Laminate and Floating Floor Underlay	Roberts® Lamilay™ Laminate and Floating Floor Underlay
Unit of Measure	Carton (9 rolls)	Roll (60m ²)
Coverage	108m ² per carton or 12m ² per roll	60m ²
Width of Roll	1.2m	1.2m
Roll length	10m	50m
Thickness	2.0mm	2.0mm
Weight of roll	.63kg	3.2kg
Weight of carton	7.5kg	



QEP CO NZ Limited

Ph 09 415 9700

Fax: 09 415-9704